


CPR cable - INSTRUMENTATION CABLES

IDENTIFICATION AND REACTION TO FIRE

FG16XHOHM16FM16 - 0,6/1 kV - PAIR
Cca-s1b,d1,a1

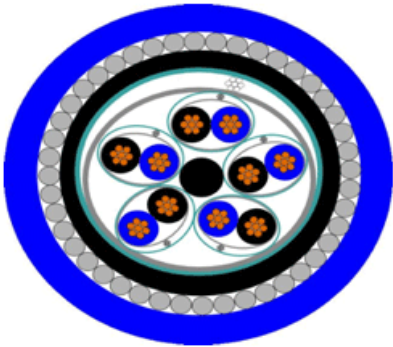

DRAWING IS ONLY ILLUSTRATIVE

CABLE CONSTRUCTION AND SPECIFICATIONS

CONDUCTOR	Material	Flexible annealed bare copper cl.5
INSULATION	Material	Crosslinked elastomeric compound type HEPR suitable for CPR (G16 quality)
	Colors	On Request
PRIMARY CABLING	Type	Cores are twisted in pair with optimal lay length
PAIR SCREEN	Material	Al/polyester tap, Al in continuous contact with stranded tinned copper cl.2
TOTAL CABLING	Type	Pairs are cabled together with optimal lay length
TOTAL SCREEN	Material	Al/polyester tape, Al in continuous contact with stranded tinned copper cl.2
ARMOUR	Type	Wire armour with counter spiral tape
	Material	Galvanized steel wire 0,6 mm ≤ 30 mm under armour diameter Galvanized steel wire 0,9 mm ≥ 30 mm under armour diameter
SHEATH	Material	Halogen free thermoplastic compound suitable for CPR (M16 quality)
	Colors	Natural, Grey, Black or Light blue

CHARACTERISTICS

Electrical:	Voltage rating	600/1000 V
	Insulation resistance	> = 1000 MOhm x km
	Dielectric test cond/cond	4000 V a.c. x 10 min
Mechanical and Installation:	Min. bending radius	12 x Diam.
	Max operating temperature	90 °C
	Max short circuit temperature	250 °C

Issued: DT // Approved: QA

This is a part of our products range. For any technical information or change of cable type do not hesitate to contact our sales department.

DATASHEET

STANDARDS OR SPECIFICATIONS CONSTRUCTION

Conductors of insulated cables	CEI 20-29 (CEI EN 60228)	IEC 60228	EN 60228
National annex to EN 50363-0: Insulating, sheathing and covering materials for low-voltage energy cables - Part 0: General Introduction	CEI 20-11/0-1;V1	-	-
Rubber insulated cables with rated voltages between 1 kV and 30 kV (where applicable)	CEI 20-13 PQA	-	-

STANDARDS OR SPECIFICATIONS TEST

Test on electric and optical fibre under fire conditions Part 1-2: Test for vertical flame propagation for a single insulated wire or cable - Procedure for 1 kW pre-mixed flame	CEI 20-35/1-2 (CEI EN 60332-1-2)	IEC 60332-1-2	EN 60332-1-2
Common test methods for cables under fire conditions - Heat release and smoke production measurement on cables during flame spread test - Test apparatus, procedures, results	CEI 20-108 (CEI EN 50399)	-	EN 50399
Common test methods for cables under fire conditions - Test on gases evolved during combustion of materials from cables. Part 2-2: Procedures - Determination of degree of acidity of gases for cables by determination of the weighted average of pH and conductivity	CEI 20-37/2-3 (CEI EN 50267-2-3)	-	EN 50267-2-3
Smoke density: Test procedures	CEI 20-37/3-1 (CEI EN 61034-2)	IEC 61034-2	EN 61034-2 EN 50268-2

Issued: DT // Approved: QA

This is a part of our products range. For any technical information or change of cable type do not hesitate to contact our sales department.

FORELIND®

Special Electrical Cables

CPR cable - INSTRUMENTATION CABLES

PAGE 03

DATASHEET

IDENTIFICATION (*)	P/N	Max conductor resistance at 20°C	Nom. Under armour Ø	Nom. Outer Ø	Nom. Weight
		Ohm/km	mm	mm	kg/km
FG16XHOHM16FM16 - 0,6/1 kV - 2x2x0,75 mm2	9700	26	11,31	16,81	483
FG16XHOHM16FM16 - 0,6/1 kV - 6x2x0,75 mm2	9703	26	15,42	20,92	764
FG16XHOHM16FM16 - 0,6/1 kV - 12x2x0,75 mm2	9705	26	20,6	26,1	1117
FG16XHOHM16FM16 - 0,6/1 kV - 24x2x0,75 mm2	9707	26	29,27	35,39	1875
FG16XHOHM16FM16 - 0,6/1 kV - 2x2x1,5 mm2	9716	13,3	12,99	18,49	588
FG16XHOHM16FM16 - 0,6/1 kV - 6x2x1,5 mm2	9719	13,3	17,62	23,12	945
FG16XHOHM16FM16 - 0,6/1 kV - 12x2x1,5 mm2	9721	13,3	23,64	29,34	1455
FG16XHOHM16FM16 - 0,6/1 kV - 24x2x1,5 mm2	9723	13,3	33,71	40,85	2703
FG16XHOHM16FM16 - 0,6/1 kV - 2x2x2,5 mm2	9724	7,98	14,66	20,16	701
FG16XHOHM16FM16 - 0,6/1 kV - 6x2x2,5 mm2	9727	7,98	20,09	25,51	1166
FG16XHOHM16FM16 - 0,6/1 kV - 12x2x2,5 mm2	9729	7,98	26,97	33,09	1892
FG16XHOHM16FM16 - 0,6/1 kV - 24x2x2,5 mm2	9731	7,98	38,97	46,51	3568

(*) Any other identification on request. Please contact our technical department

Issued: DT // Approved: QA

This is a part of our products range. For any technical information or change of cable type do not hesitate to contact our sales department.



FORELIND[®]

Special Electrical Cables

FOR.EL.IND S.p.A.

Via Europa, 6 - 24055 Cologno al Serio (BG - ITALY)

Phone + 39 035 899191 - Fax + 39 035 4819224

www.forelind.com E-mail: sales@forelind.com